


Photovoltaic Modules

Photovoltaic modules
72pcs 156×156mm mono-crystalline silicon cell

GPM300-B-72

The GPM280 series module consists of 72pcs156×156mm mono-crystalline silicon solar cells which are in high efficiency, individually characterized and electronically matched before interconnection. Laminated with high quality toughened glass, EVA and TPT, characteristic operation of solar cells can be ensured under any climatic conditions.


After assembled by anodized aluminum alloy frame and junction box with MC connectors, the GPPV solar modules are designed for long service life, easy to install, withstand the storm, high wind and hail impact etc.

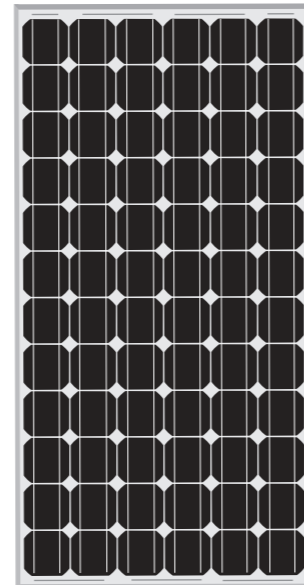

Photovoltaic Modules

Photovoltaic modules
72pcs 156×156mm mono-crystalline silicon cell

GPM300-B-72

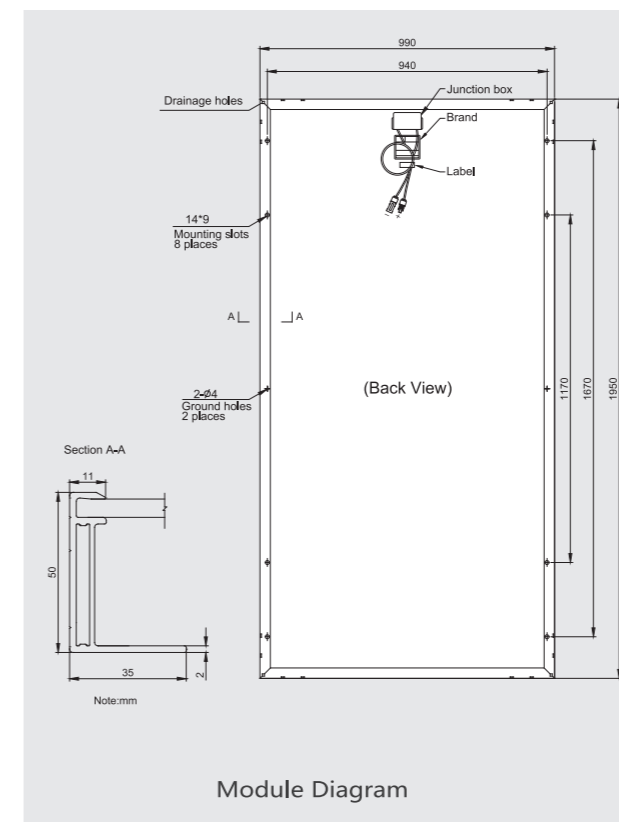

Specifications

Cell	Mono-crystalline silicon solar cells 156mm×156mm
No. of cells and connections	72(6×12)
Dimension of module	1950mm×990mm×50mm




Temperature Coefficients

Nominal Operating Cell Temperature		45°C±2°C
Short-circuit current temperature coefficient	$\alpha(I_{sc})$	0.09%/°C
Open-circuit voltage temperature coefficient	$\beta(V_{oc})$	-0.34%/°C
Peak power temperature coefficient	$\gamma(P_{max})$	-0.37%/°C

above data is only for reference
above data is only for reference

Output

Cable	4.0mm ² (TUV)
Lengths	1100mm
Connecter	MC Type

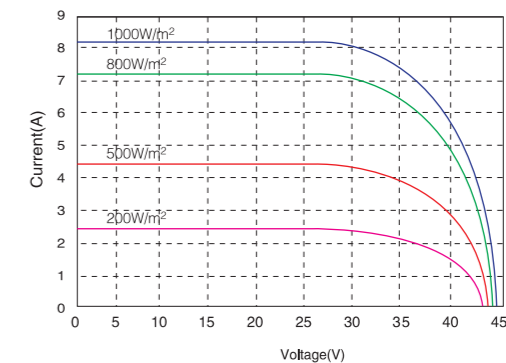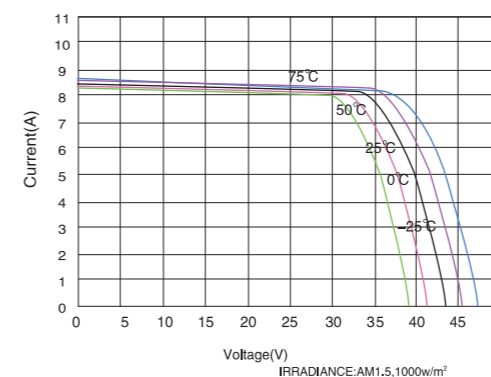

Module		GPM300-B-72											
Encapsulation	Glass/EVA/Cells/ EVA/TPT												
Size and Number of cells	156mm×156mm 72/6×12pcs												
Maximum Power (Pmax)	W	240	245	250	255	260	265	270	275	280	285	290	
Power Tolerance		± 3%											
Open Circuit Voltage (Voc)	V	43.6	43.8	44.0	44.2	44.3	44.3	44.6	44.6	44.8	44.8	44.8	
Short Circuit Current (Isc)	A	7.65	7.75	7.87	7.98	8.02	8.08	8.12	8.28	8.33	8.38	8.41	
Maximum Power Voltage (Vmp)	V	34.4	34.5	34.7	34.8	34.8	34.9	35.0	35.2	35.3	35.5	35.7	
Maximum Power Current (Imp)	A	6.98	7.10	7.23	7.33	7.47	7.59	7.71	7.81	7.93	8.03	8.12	
Max.syst. Oper. voltage	V	1000V											
Diodes		6 by-pass											
Dimension	mm	1950×990×50											
Weight	kg	24											
Operate Temp. scope	°C	-40/+85											
Relative humidity		0 to 100%											
Resistances		227g steel ball fall down from 1m height and 60m/s wind											
Warranty		Pm is not less than 90% in 10 years and 80% in 25 years											

Test condition: @STC 1000W/m2, AM1.5, 25°C